



SWIMMING POOLS

PRICE LIST EUR

2026



WWW.DRYDENAQUA.COM



OUR SOLUTIONS TO MAKE THE POOLS OF THE FUTURE GREENER AND MORE ENVIRONMENTALLY FRIENDLY.



AFM®
ACTIVATED FILTER MEDIA

The most
sustainable filter
media for your
swimming pool.



DAISY®
DRYDEN AQUA INTEGRATED SYSTEM

Reduce your
swimming pool's
operating costs
in 3 simple steps.



SPACE
SWIMMING POOL AI CLOUD EXPERT

Use Artificial
Intelligence (A.I) to
**maximise energy, water
and chemical savings.**



Dryden Pool Academy, available in 5 languages,
is a new free online training service created by
Dryden Aqua. It offers an excellent opportunity
to significantly enhance your knowledge of
swimming pools.



Watch the
Dryden Pool Academy




THE BEST FILTRATION MEDIA

AFM[®]

ACTIVATED FILTER MEDIA




UP TO 50% LESS CHEMICALS, TRICHLORAMINES & THMS

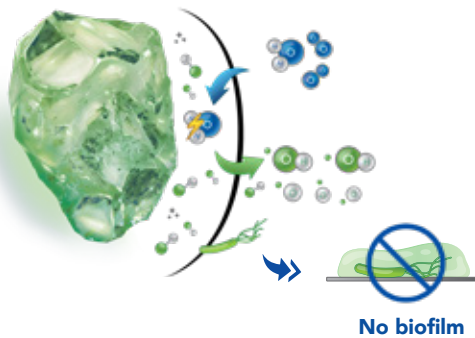

Hydrophobic surface

Repels water,
Attracts organics!

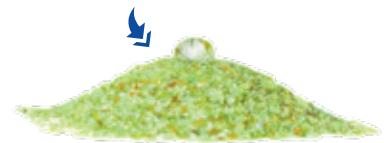

Self-sterilising surface

- ✓ No growth of pathogens
- ✓ No clumping & channeling
- ✓ No chlorine smell
- ✓ No loss of efficiency

Superior filtration properties

- ✓ Filtration down to 1 micron
- ✓ Clean crystal clear water
- ✓ Reduced chemical consumption
- ✓ Up to 50% less THMs




GREEN MANUFACTURING PROCESS



UP TO 80% LESS BACKWASH WATER!



Filter bed expansion at 25°C

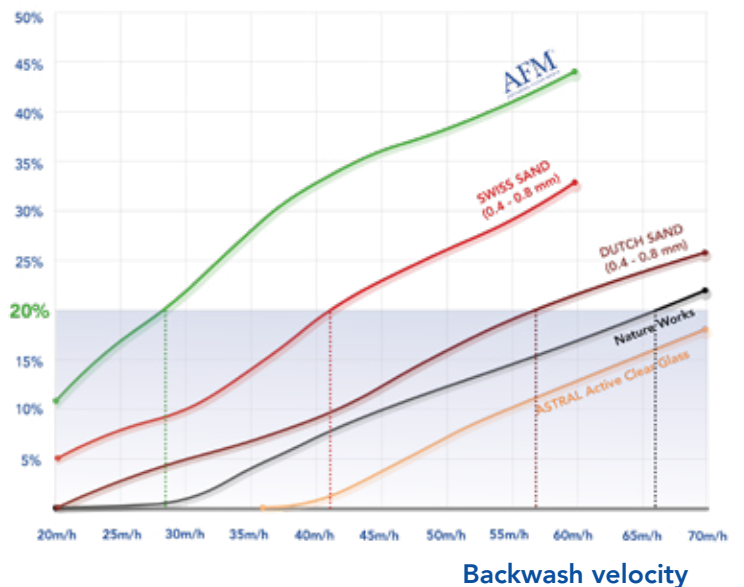

THE MOST SUSTAINABLE FILTER MEDIA FOR PRIVATE & PUBLIC POOLS!

AFM® - Activated Filter Media

A/10



DOWNLOADS



Package quantity	11kg bag	21kg bag	25kg bag	1'000kg bulk bag
Pallet quantity	80 on CP-1	40 on EUR-1	40 on CP-1	CP-1
List Price € excl. VAT	30.00	47.50	52.50	2,100.00

AFM® ng mix grade *	0.4 – 1.2 mm	10040	x	x	x
AFM® ng grade 1	0.4 – 0.8 mm	x	10021	10005	10015
AFM® ng grade 2	0.7 – 2.0 mm	x	10022	10006	10016
AFM® ng DIN grade	0.7 – 1.2 mm	x	10027	10007	10017

AFM® S grade 0	0.25 – 0.5 mm	x	x	10000	10010
AFM® S grade 1 **	0.4 – 0.8 mm	x	x	10001	10011
AFM® S grade 2 **	0.7 – 2.0 mm	x	x	10002	10012
AFM® S DIN Grade **	0.7 – 1.2 mm	x	x	10004	10014
AFM® S grade 3	2.0 – 4.0 mm	x	10023	10003	10013

* Adapted for small residential filters only. Use 100% mix grade in the filter.

** Use these AFM® S Grades for public pools in case of Air backwash only.

Minimum order quantity: 28 pallets per truck (21kg) or 24 pallets (25kg); 20 pallets per container (20 ft)




**Unique green
manufacturing
process**



**Better water quality
with up to 50% less
chlorine**



**Up to 80% less water
compared to other
filter media**



**Stable performance
No loss of
efficiency**


Determine the quantity of AFM® you need

By volume, AFM® (1,300 kg/m³) is 15% lighter than sand (1,500 kg/m³).
For example, to replace 250 kg of sand, you will need 210 kg of AFM®.




25KG SAND = 21KG AFM®
Weight of sand x 0.85 = Weight of AFM®

FOR SMALL DIAMETER FILTERS < Ø 800mm

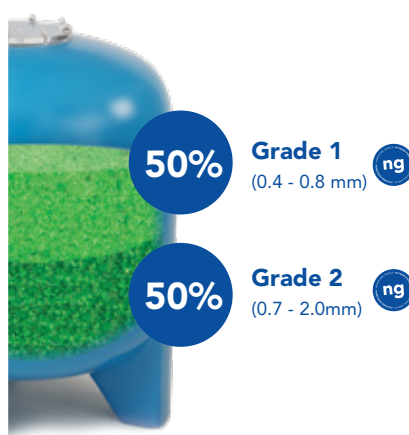

Filtration speed : 15 to 30m/h
Example: 30 x filter surface (m²)
= **Filtration flowrate (m³/h)**

FOR LARGE DIAMETER FILTERS > Ø 800mm

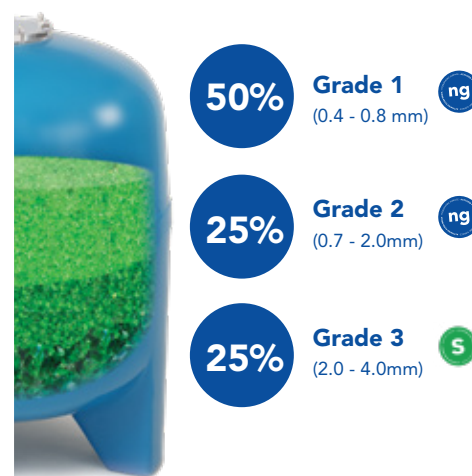

Backwash speed : 40 to 50m/h
Example: 50 x filter surface (m²)
= **Backwash flowrate (m³/h)**



AFM® DIN GRADE FOR OUTDOOR POOLS WITH HIGH ORGANIC LOAD



75% **DIN Grade**
(0.7 - 1.2mm)

25% **Grade 3**
(2.0 - 4.0mm)

i For filters smaller than
Ø800mm, it is OK to use
100% AFM® ng DIN Grade

AFM® DIN Grade (0.7 - 1.2mm) has twice the loading capacity of AFM® Grade 1 (6000 g/m² compared to 2700 g/m²) and therefore **needs 50% less backwash cycles that AFM® Grade 1.**


AFM® DIN Grade is **ideal for use in outdoor pools with high organic load.** That means instead of backwashing every 3 days – backwashing can be done every 7 days.



Important: AFM® DIN Grade requires a higher backwash velocity than Grade 1 of minimum 50 m/h. New public pools generally have this backwash speed. For private pools, you need to ensure that you have this backwash speed using a flowmeter.



DGS Grade 1
0.3 - 1.0 mm



DGS Grade 2
0.8 - 2.5 mm



DGS stands for Dryden Aqua glass sand and is most likely the best glass sand on the market. It is produced by Dryden Aqua in our own factory in strict compliance with our ISO certified process. The glass is first washed and decontaminated and then carefully broken to the appropriate particle shape and size. Above all we make sure no dangerous glass splinters can get into the filter material and that the organic load is below 100g per ton. Other glass media has a contamination between 500g and 10'000g per ton. AFM® has less than 10g/ton. But DGS is not AFM®. DGS does not undergo our patented activation process and it is manufactured from mixed glass - the white glass is not removed.

Nevertheless, DGS is a better filter media than sand because it biofouls less, but it's not bio-resistant like AFM®. Still, DGS performs far better than sand. It biofouls less, filters more effectively, and provides an excellent option for projects where cost is critical. DGS: the same price as standard glass sand, but far higher quality.

Advantages:

- Clearer water
- Less consumption of disinfectant
- Less chlorine smell

Filter filling:

Dryden Aqua recommends the following layers:
60% DGS 1
20% DGS 2
20% DGS 3

Remark:

For smaller filters (<1,000 mm diameter) and for all filters with nozzle plate irrespective of filter diameter, use 60% of DGS 1 and 40% of DGS 2.

Particle size Grade 1	0.3 - 1.0 mm
-----------------------	--------------

Particle size Grade 2	0.8 - 2.5 mm
-----------------------	--------------

Bulk bed density	1,25kg/l
------------------	----------

Loose organics	95g/ton
----------------	---------

Ferrous metal	13g/ton
---------------	---------

Item No.	Description	Package quantity	Pallet quantity	List price € excl. VAT
11007	Dryden Glass Sand grade 1 0.3 – 1.0 mm	Bags of 21 kg	40 on EUR-1	27.00
11008	Dryden Glass Sand grade 2 0.8 – 2.5 mm	Bags of 21 kg	40 on EUR-1	27.00
NEW 11009	Dryden Glass Sand grade 3 2.0 – 4.0 mm	Bags of 21 kg	40 on EUR-1	27.00
11001	Dryden Glass Sand grade 1 0.3 – 1.0 mm	Bags of 25 kg	40 on CP-1	31.50
11002	Dryden Glass Sand grade 2 0.8 – 2.5 mm	Bags of 25 kg	40 on CP-1	31.50
NEW 11003	Dryden Glass Sand grade 3 2.0 – 4.0 mm	Bags of 25 kg	40 on CP-1	31.50
11004	Dryden Glass Sand grade 1 0.3 – 1.0 mm	Bulk Bags of 1,000 kg	CP-1	1'260.00
11005	Dryden Glass Sand grade 2 0.8 – 2.5 mm	Bulk Bags of 1,000 kg	CP-1	1'260.00
NEW 11006	Dryden Glass Sand grade 3 2.0 – 4.0 mm	Bulk Bags of 1,000 kg	CP-1	1'260.00

In public indoor pools: For the reduction of organic chloramines 5 to 10 cm of activated carbon can be added as a top layer. The combined chlorine levels will be reduced by up to 50 %. Chlorine consumption will rise accordingly.

Specific weight: 500 kg / m³

Packing unit: 20 pcs per pallet = 1 m³

Only Activated Carbon made of Coconut shells will provide good results!



Item No	Description	Package quantity	Pallet quantity	List price € excl. VAT
90105	Activated carbon from coconut shells 1.18 - 2.36mm	Bags of 50 l/25 kg	20 on CP-1	245.00

The best Coagulant and Flocculant

APF® (All Poly Floc) is a multi spectrum coagulant and flocculant containing 5 components and is therefore covering a wide spectrum. APF® also contains **NEW** 1.5 l of NoPhos. APF® combined with AFM® and a ZPM will achieve the best possible filtration performance.

- **Dryden DAISY®: Crystal clear water with a nominal filtration to 0.1 micron**
- **With DAISY® up to 80% less consumption of disinfectants**
- **Dryden DAISY® is the basis for chlorine free systems**

Automatic dosage: Application rate is 0.5 - 1.0 ml per m³ of water filtered.

For example, if water flow through filter is 10 m³/hr, APF® dosing rate will be 5 - 10 ml/h. Inject APF® via ZPM or directly before or into the pump.



Item No.	Description	Package quantity only sold in full pallets	List price € excl. VAT
20011	APF® Pool 20 l / 22 kg	24 pcs / pallet (EUR-1)	100.00
20012	APF® WT 20 l / 22 kg (for public pools)	24 pcs / pallet (EUR-1)	110.00

NoPhos® - No Phosphate

NoPhos => No Phosphate => No Problems

NoPhos extracts phosphate from the water. Phosphate is a vital nutrient for algae and bacteria. If all phosphates are removed from the water, algae and bacteria will disappear. NoPhos is a biological solution and the best preventive treatment replacing the need for all algicides.

- **Eliminates phosphates**
- **Biological solution**
- **Water becomes crystal clear**

Dosage: Weekly add 1 - 2 ml per m³ of water (ex.: 50 m³ pool = 50-100 ml).

Use the Phosphate Test Kit to measure the phosphate concentration; then dose NoPhos accordingly: To bind 0.1 ppm phosphate, you need 1 ml NoPhos per m³ of pool water.

Example: Pool volume of 100 m³ and a phosphate concentration of 0.5 ppm you need 500 ml of NoPhos.

Target values for phosphate concentration: Swimming pools/water features: 0.0 ppm
Natural swimming pools/ponds: 0.05 – 0.1 ppm


Item No.	Description	Package quantity (only sold in full cartons/pallets)	List price € excl. VAT
20000	NoPhos 1 l / 1.2 kg	12 pcs / carton - 480 pcs / pallet (EUR-1)	35.00
20001	NoPhos 5 l / 6 kg	4 pcs / carton - 160 pcs / pallet (EUR-1)	125.00
20002	NoPhos 20 l / 24.5 kg	24 pcs / pallet (EUR-1)	395.00
20006	10x Phosphate Test strips		40.00



Filtering UV light to save chemicals

ACO® is a highly innovative, ecofriendly liquid product, especially effective in any outdoor pools, including salt water pools.

ACO® protects chlorine from photo oxidation through the sun. The half-life of inorganic chlorine (40min) is increased by factor 4, eliminating the need for cyanuric Acid (CYA) or stabilized chlorine.

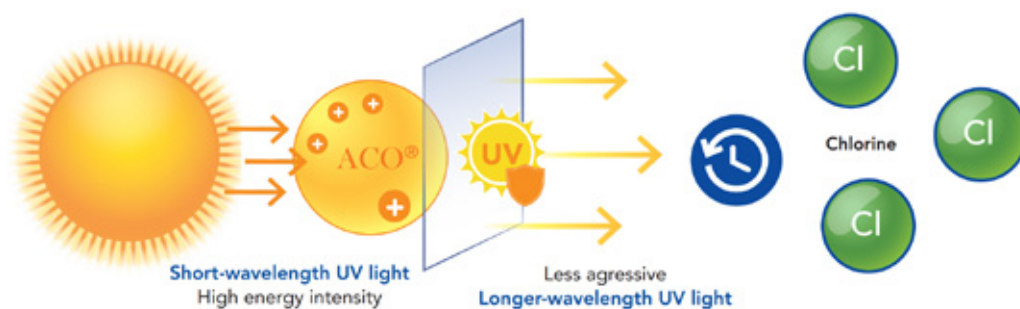

Dosage: 1-2 l per 100 m³ of pool water per week or 5-10 l per 100 m³ per month. Apply directly to pool and shake well before use.

Item No.	Description	Package quantity (only sold in full cartons/pallets)	List price € excl. VAT
20022	ACO® 5 kg	4 pcs / carton - 160 pcs / pallet (EUR-1)	35.00
20021	ACO® 20 / 22 kg	24 pcs / pallet (EUR-1)	90.00



CHLORINE CONSUMPTION REDUCED BY 50%*
NO WASTE OF CHLORINE, WATER & ENERGY!



- ✓ * ACO® reduces chlorine consumption by an average of 50% compared to a non-stabilized pool and protects chlorine from the sun as well as cyanuric acid (CYA) at the same concentration up to 30 ppm.
- ✓ Unlike CYA, ACO® does not lead to chlorine lock.
No need to increase chlorine concentration to maintain ORP.
- ✓ Unlike CYA, ACO® does not build up over time. Pools don't need to be drained => No chlorine, water & energy waste!



 ACO® presentation



Socket
ZPM DN 40-65

NEW

ZPM DN 300
Now with 2 fins



NEW

Item No.	Size	no of fins	conn. ²	length	weight	Pressure loss			List price € excl. VAT
						0.2 bar	0.3 bar	0.5 bar	
30001	DN 40	2	1½" SK	308 mm	0.75 kg	10 m³/h	12 m³/h	15 m³/h	225.00
30003	DN 50	2	2" SK	352 mm	1.2 kg	15 m³/h	23 m³/h	30 m³/h	280.00
30014	DN 65	2	2½" SK	331.6 mm	2.8 kg	24 m³/h	30 m³/h	38 m³/h	650.00
30015	DN 80	2	3" FL	284 mm	11.2 kg	40 m³/h	47 m³/h	63 m³/h	850.00
30016	DN 100	2	4" FL	374 mm	14.4 kg	68 m³/h	83 m³/h	108 m³/h	980.00
30017	DN 125	2	5" FL	454 mm	21.0 kg	100 m³/h	125 m³/h	165 m³/h	1'450.00
30018	DN 150	2	6" FL	546 mm	26.8 kg	160 m³/h	200 m³/h	260 m³/h	1'990.00
30019	DN 200	2	8" FL	710 mm	34.6 kg	250 m³/h	370 m³/h	410 m³/h	2'850.00
30020	DN 250	2	10" FL	890 mm	70 kg	350 m³/h	410 m³/h	500 m³/h	3'990.00
30021	DN300	2	12" FL	1,057 mm	58 kg	385 m³/h	460 m³/h	580 m³/h	4'590.00

CLEARANCE OFFER! WHILE STOCK LASTS

30006	DN 100	3	4" FL	524 mm	14.5 kg	50 m³/h	60 m³/h	80 m³/h	580.00
30007	DN 125	3	5" FL	640 mm	21 kg	70 m³/h	85 m³/h	115 m³/h	750.00
30013	DN 150	3	6" FL	766 mm	27 kg	100 m³/h	125 m³/h	170 m³/h	990.00
30009	DN 250	3	10" FL	1,229.6 mm	58.6 kg	260 m³/h	325 m³/h	420 m³/h	1'890.00
30010	DN 300	3	12" FL	1,437 mm	77.2 kg	350 m³/h	410 m³/h	500 m³/h	1'990.00

SK = Socket / FL = flange



Choose the size of the ZPM according to the pressure loss. Pressure loss should be between 1 and 2 mH₂O (0.1 – 0.2 bar).

AMPLIFIES COAGULATION REACTIONS

Installed between the pump and the filter, the ZPM® creates strong water cavitation to provide the perfect mixing and turbulent environment necessary for coagulation.


BETTER WATER QUALITY FOREVER

As the zeta potential decreases, the redox potential of the water increases (up to +200 mV). The water starts to disinfect without the use of chemicals. With a small one-time investment, you improve the quality of your water forever.




GROUNDING

The ZPM® before the filter must be grounded to remove the electrons that are rubbed off during mixing.

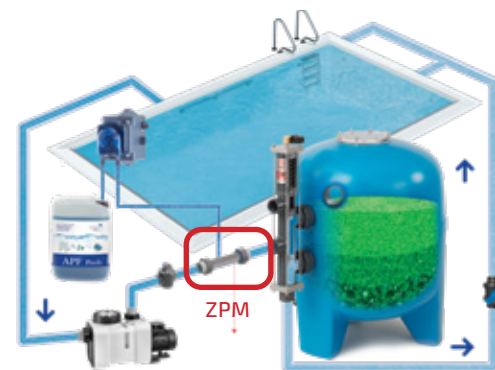

INITIATES THE FLOCCULATION PROCESS

ZPM® neutralizes the electrical charge (Zeta potential) of particles to initiate flocculation by mechanically forming larger particles that can be retained by your filter for better filtration quality.

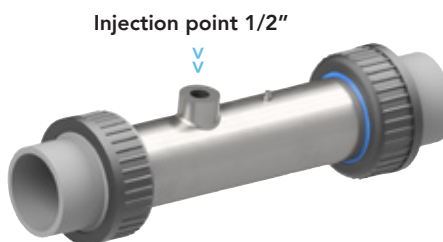


UNLIMITED LIFE SPAN

Made of stainless steel 1.4571. The ZPM® has no moving parts, requires no power supply and has no operating/maintenance costs.

DA-GEN

DRYDEN AQUA GENERATOR

SWIM IN DRINKING WATER!

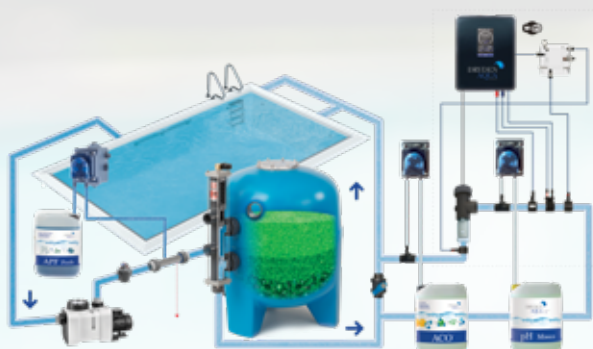

High performance hydrolyser

- ✓ Optimal & safe disinfection with free radicals
- ✓ Clear water and clean air without chlorine smell



Complete pool controller

- ✓ pH, free chlorine and/or Redox
- ✓ Filtration and backwash
- ✓ Automatic APF flocculation
- ✓ Integrated Wifi module




Swim in drinking water!

- ✓ Combine the DA-GEN® with the DAISY® system to achieve drinking water quality in your pool!



DA-GEN

DRYDEN AQUA GENERATOR

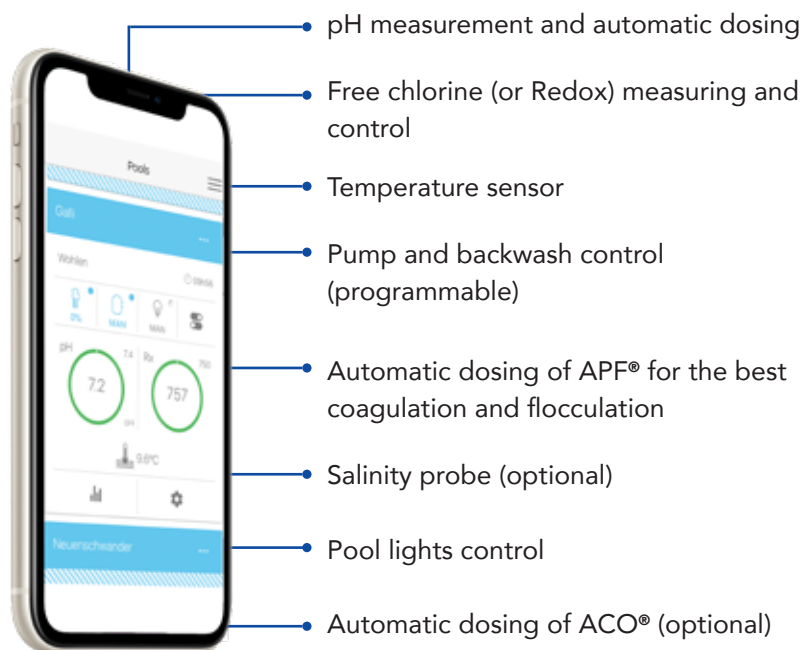

3 reasons for the DA-GEN:

1. Highly efficient electrodes: require very low conductivity: Only 1.0kg NaCl or 1.5kg MgCl₂ is needed => low corrosion risk and high production of free radicals
2. Automatic measuring and controlling of free chlorine, pH and APF®: Guarantees crystal clear water and safe disinfection without chlorine smell
3. 24/7 full control with integrated Wi-Fi module

DAISY+: Pool water in drinking water quality!

DA-Gen Complete FC

C/40



We recommend the following configuration.

DA-GEN complete FC includes the following modules:

Wi-Fi, free chlorine control, flow detector, temperature module, suction lance, TDS analyser, pH control, pH dosing pump, flocculation pump for APF®, Test kit for pH/free chlorine/alkalinity.

Everything mounted ready-to-use on a panel (NEW 75x75cm)

Item No.	Description	chlorine production		max. pool volume private	List price € excl. VAT
		TDS 1200	TDS 2400		
40001	DA-GEN complete 45-FC	7g	15g	45 m ³	7'790.00
40002	DA-GEN complete 90-FC	15g	30g	90 m ³	8'690.00
40003	DA-GEN complete 150-FC	25g	50g	150 m ³	9'890.00

DA-Gen Complete RX

C/40



The DA-GEN is also available configured with Redox control instead of free chlorine. DA-GEN complete RX includes the following modules: Wi-Fi, redox control, flow detector, temperature module, suction lance, TDS analyser, pH control, pH dosing pump, flocculation pump for APF®, Test kit for pH/free chlorine/alkalinity. Everything mounted ready-to-use on a panel (NEW 75x75cm). This configuration cannot guarantee a free chlorine level of only 0.1 mg/l!

Item No.	Description	chlorine production		max. pool volume private	List price € excl. VAT
		TDS 1200	TDS 2400		
40011	DA-GEN complete 45-RX	7g	15g	45 m ³	5'990.00
40012	DA-GEN complete 90-RX	15g	30g	90 m ³	6'790.00
40013	DA-GEN complete 150-RX	25g	50g	150 m ³	7'990.00

DA-Gen Modular

C/40

With DA-GEN modular you can customise your own DA-GEN. **WITHOUT Wi-Fi**

40020 - 40023



40025 - 40030

Item No.	Description	Approx. chlorine production		max. pool volume private	List price € excl. VAT
		TDS 1200	TDS 2400		
40021	DA-GEN modular 45	7g	15g	45 m ³	1'800.00
40022	DA-GEN modular 90	15g	30g	90 m ³	2'580.00
40023	DA-GEN modular 150	25g	50g	150 m ³	3'680.00
40025	DA-GEN modular 240	40g	80g		7'090.00
40026	DA-GEN modular 360	60g	120g		10'460.00
40027	DA-GEN modular 500	88g	175g		13'840.00
40028	DA-GEN modular 750	125g	250g		17'660.00
40029	DA-GEN modular 1,000	175g	350g		27'185.00
40030	DA-GEN modular 1,500	250g	500g		35'550.00

DA-GEN SPACE / SLAVE Unit

C/40

Hydrolysis only units (no brain) - **To be controlled by external device.**

Item No.	Description	Approx. chlorine production		max. pool volume	List price € excl. VAT
		TDS 1200	TDS 2400		
44400	DA-GEN SPACE 45	7g	15g	45 m ³	1'340.00
44401	DA-GEN SPACE 90	15g	30g	90 m ³	1'650.00
44402	DA-GEN SPACE 150	25g	50g	150 m ³	1'990.00
40035	DA-GEN SPACE 240	40g	80g		6'440.00
40036	DA-GEN SPACE 360	60g	120g		9'500.00
40037	DA-GEN SPACE 500	88g	175g		12'570.00
40038	DA-GEN SPACE 750	125g	250g		15'990.00
NOTE: TO WORK IT WITH SPACE ADD REF 44108					
44108	SPACE Modbus Cable Kit				90.00



Reduce public
pools' operating
costs with the
DA-GEN

Which unit do I need for a public pool?

Rule: Per m³/h turnover you need...

- 1 - 2g chlorine for indoor pools
- 2 - 4g chlorine for outdoor pools and spas

Example: 480 m³ pool, 2400 TDS, 4h turnover rate => 120 m³/h turnover

- Indoor Pool: 120 m³/h * 2g/m³/h = 240g => **DA-GEN 750**
- Outdoor Pool: 120 m³/h * 4g/m³/h = 480g => **DA-GEN 1500**



DA-Gen Equipment

C/40

Choose options



Customise your DA-GEN to your needs.

Item No.	Description	List price € excl. VAT
40055	pH control kit (without probe holder) (1/2")	440.00
40056	Redox kit glass (w/o probe holder) (1/2")	470.00
40057	Free chlorine kit (with space for 1 pH probe) Jesco amperimetric	2'115.00
40151	Installation set free chlorine incl. prefilter & fittings excl. PE-tube (Only FC version)	165.00
40152	Connection tube PE 10/8 mm (50 m)	69.00
40050	Temperature module (without probe holder) (1/2")	105.00
40051	Salinity control = Conductivity meter (automatic) (1/2")	630.00
40052	Flow detector (with probe holder)	120.00
40155	Ground earthing Hayward (w/o probe holder) (1/2")	144.00
43199	Test Kit for pH / free chlorine / alcalinity	17.00

Choose probe holder



40149	1/2" Probe holder for 1 or 2 options	NEW Dryden PVC Version	32.00
43220	By-pass probe holder for pH & Redox (double version with one prefilter)		155.00
40203	Wi-Fi module		570.00
40204	LAN module		570.00
40205	Touch Screen Display replacement		465.00
40206	Cover Plate for Touch Screen		75.00
40053	TDS analyser (manual)		70.00
40060	Suction lance with level sensor		140.00
50030	Stenner dosing pump Econ VX	0.30 - 2.2 l for pH & ACO®	380.00
50016	Dryden-Floc Pump	3 - 240 ml for APF®	550.00
40150	Pre-filter APIC F20 complete (big version)		157.00

DA-GEN SACRIFICE ANODE



40208	DA-GEN Sacrifice anode (Maitec) DN50 / d.63mm	190.00
40209	Replacement lid d.63mm + Zinc Anode	82.00
40210	Replacement Zinc Anode	44.00

DA-Gen Activator

A/41



Our Special Activator, made from magnesium chloride ($MgCl_2$), helps increase the hardness and the filtration performance for crystal clear water. For the best results we recommend to mix it with normal salt with a Ratio of 1:3 ($MgCl_2$:NaCl). Recommended salt level: Approx. 1000 - 2000 mg/l

Item No.	Description	Package units	List price € excl. VAT
40100	DA-GEN Activator Special	$MgCl_2$ 25 kg bag, 40 per pallet	44.00

DA-GEN Station - Liquid Chlorine version

C/50



Item No.	Description	List price € excl. VAT
43038	DA-GEN Dosing Station Basic with Touch Screen (Controller Only)	1'210.00

DA-GEN Replacement Cells

C/40

The lifetime of a cell is 5,000 to 8,000 hours. Usually they have to be replaced every 3 to 5 years.

Delivered without housing, only the cell.



*without housing - only cell

Item No.	Description		List price € excl. VAT
40061	Replacement Cell 8A	DA-GEN 24 / OXI 0	560.00
40062	Replacement Cell 15A	DA-GEN 45 / OXI 1	650.00
40064	Replacement Cell 30A	DA-GEN 90 / OXI 2	1020.00
40065	Replacement Cell 50A	DA-GEN 150 / OXI 3	1'670.00
40066	Replacement Cell 80A	DA-GEN 240	3'090.00
40067	Replacement Cell 120A	DA-GEN 360	3'990.00
40068	Replacement Cell 175A	DA-GEN 500 (For DA-GEN 1000: x2)	5'690.00
40069	Replacement Cell 250A	DA-GEN 750 (For DA-GEN 1500: x2)	8'250.00

Hidrolife Replacement Cells

C/43



Hidrolife cells

43051	Replacement Cell 16gr	Hidrolife SAL16	560.00
43052	Replacement Cell 22gr	Hidrolife SAL22	650.00
43053	Replacement Cell 33gr	Hidrolife SAL33	780.00

Controllers box

C/40



Item No.	Description	List price € excl. VAT
40041	DA-GEN 45 Controller Box	1'335.00
40042	DA-GEN 90 Controller Box	1'765.00
40043	DA-GEN 150 Controller Box	2'205.00
40048	DA-GEN 240 Controller Box	4'390.00
40049	DA-GEN 360 Controller Box	6'990.00

Item No. Description

List price €
excl. VAT**Cell holders and equipment**


43072	Cell holder for DA-GEN 24 & 45 (d63mm - L: 310)	165.00
43073	Cell holder for DA-GEN 90 & 150 (d63mm - L: 520)	295.00
43074	Cell holder for DA-GEN 240, 360, 500, 1000 (d110mm - L: 650)	415.00
43075	Cell holder for DA-GEN 750 and 1500 (d140mm - L: 760)	645.00
43076	Pipe Adapter 63 to 50mm	4.00
43077	Pipe Adapter 75 to 50mm	6.00
43078	Blind Cap for DA-GEN 45 to 90	37.00
43079	Blind Cap for DA-GEN 240 to 360	69.00
43080	Blind Cap for DA-GEN 750	86.00
43081	Cell nuts for DA-GEN 45 to 90	22.00
43082	Cell nuts for DA-GEN 240 to 360	50.00
43083	Cell nuts for DA-GEN 750	70.00
43087	Wire extension for DA-GEN 45 and 90 (1m)	21.00
43088	Wire extension for DA-GEN 150 (1m)	30.00
43089	Wire extension for DA-GEN 240 to 500 (1m)	39.00
43090	Wire extension for DA-GEN 360 and 750 (1m)	43.00

Probes and equipment

43150	pH probe 1.5m cable, BNC connector, PG-13.5mm	105.00
43151	pH probe 2.5m cable, BNC connector, PG-13.5mm	115.00
43152	Redox probe (gold), 1.5m cable, BNC connector, PG-13.5mm	135.00
43153	Redox probe (gold) 2.5m cable, BNC connector, PG-13.5mm	145.00
43185	pH 7 - Buffer solution	7.00
43186	pH 10 - Buffer solution	7.00
43184	Redox calibration Buffer 468 mV	12.00
43187	pH calibration buffer set (pH 7, pH 10, cleaning solution)	26.00
43188	pH/ORP calibration buffer set (468mV, pH 7, pH 10, cleaning solution)	38.00
43161	Conductivity probe	172.00
43197	Conductivity calibration Buffer Set (1x 1413µS, 1x 12880µS, 1x neutral)	49.00
43166	Free chlorine probe Gold/Copper (N°5)	1'130.00
43170	Proximity sensor free chlorine cell (flow sensor) (N°11)	230.00
43171	Stainless floater to flow sensor (N°12)	125.00
43173	1/2" probe holder raccord (Hayward)	23.00
40149	1/2" Probe holder for 2 probes (Dryden)	32.00
43199	Test Kit for pH / free chlorine / alcalinity	17.00

Chips and equipment

40158	pH/Rx chip	325.00
40159	Free chlorine Chip	425.00
40160	Conductivity Chip	385.00
43196	Fuse Kit (4 Amps)	12.00
40207	HDMI Module, for connection with TV/Displays	685.00
90050	Dryden Aqua Safety tub for chemical canisters	99.00

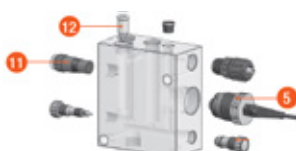

43199



40158



90050

Robust design with fully enclosed polycarbonate housing



Patented system for tool-free tube replacement

Reliable, accurate and repeatable injection

Stenner pumps are self-priming and offer a constant reproducibility of flow.

Pump head roller - 3 rollers

Designed to prevent siphoning, overdosing and loss of priming.



Solid one-piece tube construction

The tube fitting is overmoulded to the tube material for a stronger connection.



Manually adjustable flow rate with potentiometer (0% - 100%)

Dryden-Floc Pump

For coagulants & flocculants

ECON VX Pump

For pH, Chlorine and ACO®.

Practical design

The solution does not come into contact with moving parts.

Can run dry without damage and self-prime when refilled

Dryden-Floc Pump for APF®

C/50



Item No.	Description	List price € excl. VAT
NEW 50016*	Dryden-Floc pump 3.2 - 240ml incl. ref 50010 8 pcs. per box	550.00
50017	Replacement-tube 3.2-240ml/h for Dryden- Floc pump (F) incl. weight	24.00
50018	Replacement-tube 1.3- 70ml/h for Dryden- Flocpump (M) incl. weight	24.00
50019	Replacement-tube 15- 740ml/h for Dryden- Floc Pump (G) incl. weight	24.00
50025	Replacement-tube 30- 1500ml/h for Dryden- Floc Pump (H) incl. weight	24.00

Econ VX Dosing Pump for pH or Cl Dosing

C/50



NEW 50030*	Stenner dosing pump Econ VX 0.30 - 2.2 l/h incl. ref 50012 8 pcs. per box	380.00
50031	Replacement tube A for Econ VX 0.15 - 1.2 l/h incl. weight	24.00
50032	Replacement tube B for Econ VX 0.3 - 2.2 l/h incl. weight	24.00
50033	Replacement tube C for Econ VX 0.7 - 6.1 l/h incl. weight	24.00

*** 2% SPECIAL DISCOUNT FOR FULL PALLETS: 192 PCS.**

Replacement Parts Stenner

C/50



50011	Suction weight 6 mm	39.00
50010	Injection valve ¼" & ½" high pressure with non return valve for APF® pump	24.00
50012	Injection valve ¼" & ½" low pressure with non return valve for VX pump	24.00
50013	Duckbill for high pressure non return valve (ref 50010)	5.00
50004	Duckbill for low pressure non return valve (ref 50012)	5.00
50015	Ferrule 6 mm blue	2.50
50015-24	24 x Ferrule 6 mm blue (1 set of 24 pcs)	40.00
50015-100	100 x Ferrule 6 mm blue (1 set of 100 pcs)	75.00
50021	Connection nut for tube	3.00
50023	Replacement pump head cover for 50016 & 50030	22.50
50024	Replacement pump head roller for 50016 & 50030	44.00

INTELLIGENCE FOR YOUR POOL



COMPLETE POOL FLEET MANAGEMENT

Manage every pool from distance like you're standing beside it.



PREDICTIVE POOL PROTECTION

Spot and prevent issues before they occur.



HIGHER PRODUCTIVITY & PROFIT

Act proactively. Manage more pools with fewer resources.



REDUCED OPERATING COSTS

Save on chemicals, water and energy

NEW SPACE RANGE WHAT'S NEW?

NEW HARDWARE BUILT FOR THE FUTURE. MORE ADVANCED, PRACTICAL, DURABLE, EXPANDABLE.

-  Custom-built enclosure with new PCB and cable entry plate.
-  Fast Next-Gen Industrial Microprocessor
-  **UP TO 32** Up to 32 control relays with Extension module (Pilot)
-  Adapted to dual Filtration Systems Monitoring & Control
-  Acrylic cell integrating all sensors and new rotameter
-  2x integrated plug-in daughter boards for future needs

MORE CONNECTED THAN EVER. FAST. FLEXIBLE. RELIABLE.

-  Integrated Wifi
-  Integrated GB Ethernet
-  **4G** Integrated GSM Router
-  DMX Lighting ready
-  Updated SPACE App
-  **WiFi** Faster Pool setup with Direct Wifi App



Next-Gen Industrial Microprocessor

Our new future-proof microprocessor delivers 16x faster processing and 64x more memory. It ensures smarter performance, seamless multitasking, and maximum efficiency in advanced pool management.



Dual filtration systems Monitoring & Control


SPACE now supports and delivers the most advanced monitoring and control for dual filtration systems, with 2x pressure sensors, 2x flowmeter connections, control of 2x variable-speed pumps, 2x backwash valves, and much more.

All Your Pools. All in One Place.



Improved SPACE PRO App

Updated, the SPACE PRO App delivers a modern interface, faster performance, responsive design, advanced fleet and team management, simplified pool configuration, and instant data access.

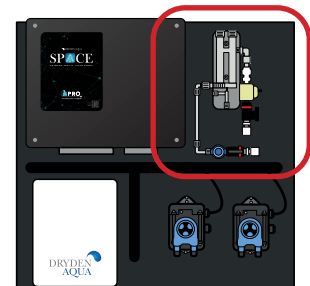

New SPACE Acrylic Cell

The new "all-in-one" SPACE acrylic cell is far more practical and easy to install. It holds pH, ORP, FC, 2x water pressure sensors, plus a rotameter for flow detection, salinity, and water temperature measurement!

NEW SPACE RANGE FEATURES OVERVIEW



FULLY OPEN SYSTEM, COMPATIBLE
WITH 3RD PARTY EQUIPMENT



MACHINE LEARNING
TECHNOLOGY



ALWAYS UP-TO-DATE.
AUTOMATIC CLOUD-BASED FIRMWARE UPDATES

A SATELLITE

DATA ACQUISITION + DOSING



A PRO

INTEGRATED SYSTEM



A PILOT

CONTROL EXTENSION



2 CONTROL RELAYS (PH & DISINFECTION)



Smart, adaptive chemical dosing

TAC Total Alkalinity Monitoring



Drum Level monitoring



Overdosing security



LSI-driven pH automatic adjustment



Electrolysis Cell's Polarity Inversion and
Production Control (via Modbus)



Anti-freeze protection



Dual pump / filter monitoring
(water pressure & flowrate)



Automatic water refills



Early Leak detection

—

—

—

—

—

—

—

—

—

—

—

—

—

17 CONTROL RELAYS



Smart, adaptive chemical dosing

TAC Total Alkalinity Monitoring



Drum Level monitoring



Overdosing security



LSI-driven pH automatic adjustment



Electrolysis Cell's Polarity Inversion and
Production Control (via Modbus)



Anti-freeze protection



Dual pump / filter monitoring
(water pressure & flowrate)



Automatic water refills



Early Leak detection



Automatic water reductions



Pool cover control



Pool Light control (based on epheremis)



Dual filtration pump control
and variable speed adjustment



Filtration Programming



By-pass Pump control (overflow pools)



Automatic dual filter backwash



Automatic coagulation & flocculation



Automatic Suction valve Control for
ECO Mode & backwash optimisation



Automatic Rinsing valve control



Water temperature / Heating Control




Additional Equipment Control

+15 ADDITIONAL CONTROL RELAYS

Expand your reach with our Control extension unit SPACE Pilot

Compatible with both SPACE Satellite
and SPACE PRO, SPACE Pilot extends
control with 15 additional relays per
unit. Add one to SPACE PRO, or up
to two to SPACE Satellite, to reach
a full 32-relay capacity for remote
management of even the most
complex pool installations.

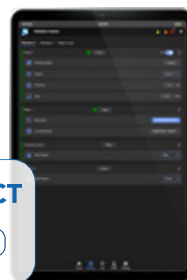

DIRECT

WiFi

Faster pool setup with Direct Wifi APP

No more tiny displays! SPACE is equipped
with WiFi Direct App connectivity,
allowing smartphones to connect instantly
without the need for a separate network.
This enables fast, hassle-free setup and
direct control of the device.



Meet SPACE PRO — the smartest all-in-one system for complete pool management. On top of advanced monitoring, it brings full remote control of all your equipment, and intelligent automation **powered by 17 integrated relays** making it the **ultimate controller for high performance overflow pools!**

***DAISY+ = Swim in Drinking Water!**

1 CHOOSE YOUR SPACE PANEL

SPACE PRO Complete with DA-GEN PH/REDOX

C/44

DAISY+



NA = No APF Pump

Includes: SPACE PRO Control Unit, 4 Modbus connections, **1x FlowVis Digital Flow kit**, **DA-GEN SPACE hydrolyser**, SPACE Acrylic chamber incl. 1x GOLD pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, **salinity** and water temperature measurement, Air temperature sensor, **Dryden-Floc pump for APF**, 1x Stenner Econ VX for pH Minus, 1x Suction lance with level sensor, pre-assembled and wired on black PVC panel 75x75cm. Integrated Ethernet/Wifi and **4G/GSM Router**. **Options: Free chlorine (C), Total Chlorine (D)**

Item No.	Description	chlorine production		max. pool volume private	List price € excl. VAT
		TDS 1200	TDS 2400		
44011	SPACE PRO Complete 45-Rx with APF	7g	15g	45 m ³	7'995.00
44012	SPACE PRO Complete 90-Rx with APF	15g	30g	90 m ³	8'295.00
44013	SPACE PRO Complete 150-Rx with APF	25g	50g	150 m ³	8'495.00
44011-NA	SPACE PRO Complete 45-Rx - No APF	7g	15g	45 m ³	7'445.00
44012-NA	SPACE PRO Complete 90-Rx - No APF	15g	30g	90 m ³	7'745.00
44013-NA	SPACE PRO Complete 150-Rx -No APF	25g	50g	150 m ³	7'945.00

OPTIONAL: FREE CHLORINE (C) AND TOTAL CHLORINE (D)



Free chlorine
Sensor

Total chlorine
Sensor

NEW

44320 **SPACE Free Chlorine Option (C)** includes FC sensor with plug-in PCB without chamber. The sensor is placed in the acrylic chamber of the panel. 990.00

NEW


44302 **SPACE Total Chlorine Option (D)** includes TC Sensor and a separate acrylic Chamber. Combine with Free chlorine Option for combined chlorine measurement. 1'100.00

SPACE PRO Station with Liquid chlorine PH/REDOX

C/44

DAISY

44014

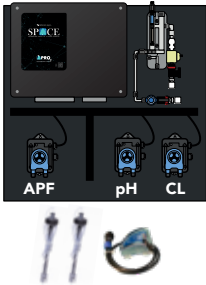

Includes: **SPACE PRO** Control Unit, 4 Modbus connections, 1x FlowVis Digital Flow kit, SPACE Acrylic Cell incl. 1x Platinum pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, Air temperature sensor, Dryden-Floc pump for APF, 1x Stenner Econ VX for pH Minus, 1x Stenner Econ VX for liquid chlorine, 2x Suction lances with level sensor, pre-assembled and wired on black PVC panel. Integrated Ethernet/Wifi and 4G/GSM Router.

Item No.	Description	List price € excl. VAT
44014	SPACE PRO Station Rx with APF Pump (Redox)	6'990.00
44014-NA	SPACE PRO Station Rx - No APF Pump (Redox)	6'440.00

OPTIONAL: FREE CHLORINE (C) AND TOTAL CHLORINE (D)



NEW


NEW

44320	SPACE Free Chlorine Option (C) includes FC sensor with plug-in PCB without chamber. The sensor is placed in the acrylic chamber of the panel.	990.00
44302	SPACE Total Chlorine Option (D) includes TC Sensor and a separate acrylic Chamber. Combine with Free chlorine Option for combined chlorine measurement.	1'100.00

SPACE PRO Electrolysis for retrofit PH/REDOX

C/44

DAISY

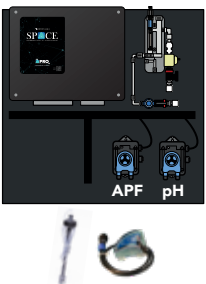

Includes: **SPACE PRO** Control Unit, 4 Modbus connections, 1x FlowVis Digital Flow kit, SPACE Acrylic Cell incl. 1x GOLD pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, Air temperature sensor, Dryden-Floc pump for APF, 1x Stenner Econ VX for pH Minus, 1x Suction lance with level sensor, pre-assembled and wired on black PVC panel. Integrated Ethernet/Wifi and 4G/GSM Router.

44017	SPACE PRO Electrolysis Rx with APF Pump (Redox)	6'490.00
44017-NA	SPACE PRO Electrolysis Rx - No APF Pump (Redox)	5'940.00

OPTIONAL: FREE CHLORINE (C) AND TOTAL CHLORINE (D)



NEW

NEW

44320	SPACE Free Chlorine Option (C) includes FC sensor with plug-in PCB without chamber. The sensor is placed in the acrylic chamber of the panel.	990.00
44302	SPACE Total Chlorine Option (D) includes TC Sensor and a separate acrylic Chamber. Combine with Free chlorine Option for combined chlorine measurement.	1'100.00

2 ADD WATER LEVEL SENSORS ACCORDING TO POOL TYPE (SKIMMER OR OVERFLOW)





44103	Water Level Sensors for Buffer Tank - overflow pools (4 sensors pack)	240.00
44322	Hydrostatic Pressure Level Meter for Buffer Tank - overflow pools	596.00
44102	Water Level Sensors for Skimmer pools in V4A for liquid chlorine pools	150.00
44102-T	Water Level Sensors for Skimmer pools in Titanium for salt water pools	240.00
081083	Magnetic valve for water level regulation 24 VAC 13mm G ½" Bürkert	162.00

3 CHOOSE YOUR OPTIONS



Check all models page 32

44301	Prominent Free Chlorine Sensor with Chamber & installation kit (for CYA)	2'995.00
44121	SPACE 2.0 Pressure Sensor with 1.2m cable (for 2 nd filter if dual filtration system)	250.00
90033	FlowVis Digital Sensor kit incl Sensor, screws and 8m cable (for second filter if dual filtration system)	450.00
40150	Pre-filter APIC F20 complete (big version)	157.00
90021-D	FlowVis Flow Meter d.63mm (2,4 - 24 m³/h) SPACE ready	250.00
90026-D	FlowVis Flow Meter d.75mm (7,0 - 45 m³/h) SPACE ready	250.00
90022	FlowVis Flow Meter d.90mm (16 - 54 m³/h) SPACE ready	670.00
90023	FlowVis Flow Meter d.110mm (27 - 102 m³/h) SPACE ready	690.00
44100	Energy Meter Single-Phase IoT	270.00
44101	Energy Meter Multi-Phase IoT	340.00
50030	Stenner dosing pump Econ VX (0.30 - 2,2 l/h) for ACO	380.00
40060	Suction lance with level sensor	140.00
-	Besgo automatic backwash valves	Refer to Besgo Price list www.besgo.ch
-	Besgo 3-way valves	Refer to Besgo Price list www.besgo.ch
40208	DA-GEN Sacrifice anode DN50 / d.63mm	190.00
40209	Replacement lid d.63mm + Zinc Anode	82.00
40210	Zinc Anode	44.00

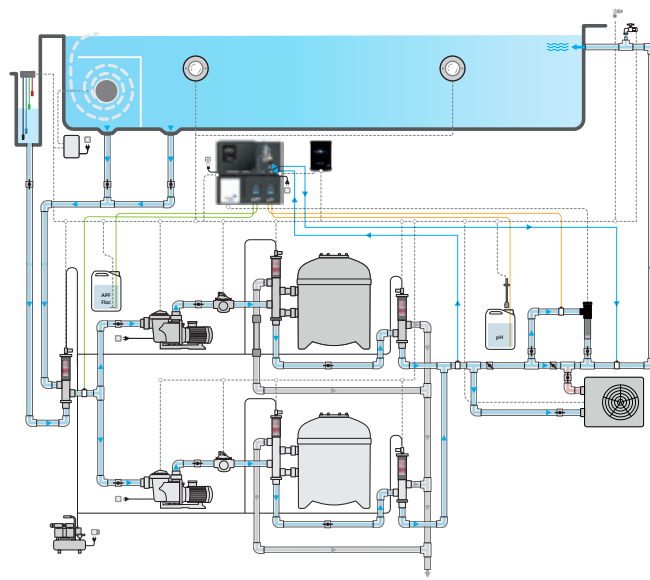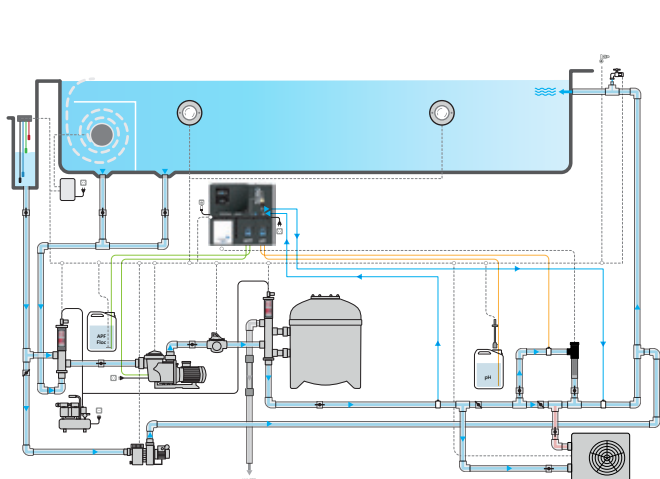

Exclusive: With Flowrate, water pressure, Free chlorine and Total chlorine

The most advanced monitoring & disinfection system


AI-powered, SPACE Satellite combines **real-time predictive monitoring, intelligent chemical dosing, and smart water refill automation** — giving you complete visibility, secure process control, and consistently flawless water quality across every pool you manage **whether public or private.**



1 CHOOSE YOUR SPACE PANEL

SPACE Satellite with Liquid Chlorine

C/44

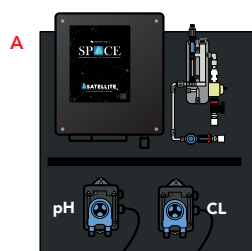

Standard (ref 44030) includes: SPACE Satellite Control Unit, 4 Modbus connections, SPACE Acrylic Cell incl. 1x platinum pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, 1x Air temperature sensor, 2x Stenner Econ VX for pH Minus & Liquid Chlorine, 2x Suction lances with level sensor, pre-assembled and wired on black PVC panel. Integrated Ethernet/Wifi and 4G/GSM Router. **Options:** Digital Flow (B), Free chlorine (C), Total Chlorine (D)

Item No.	Description	List price € excl. VAT
44030	SPACE Satellite Redox Only (A)	4'990.00

OPTIONAL:

90033	SPACE Digital Flow Option (B) includes FlowVis® Digital Sensor with screws and 8m Cable Kit (3 wires)	450.00
44320	SPACE Free Chlorine Option (C) includes FC sensor with plug-in PCB without chamber. The sensor is placed in the acrylic chamber of the panel.	990.00
44302	SPACE Total Chlorine Option (D) includes TC Sensor and a separate acrylic Chamber. Combine with FC Sensor for combined chlorine measurement.	1'100.00


2 ADD WATER LEVEL SENSORS ACCORDING TO POOL TYPE (SKIMMER OR OVERFLOW)



44103	Water Level Sensors for Buffer Tank - overflow pools (4 sensors pack)	240.00
-------	--	--------



44322	Hydrostatic Pressure Level Meter for Buffer Tank - overflow pools	596.00
-------	--	--------



44102	Water Level Sensors for Skimmer pools in V4A for liquid chlorine pools	150.00
-------	---	--------



44102-T	Water Level Sensors for Skimmer pools in Titanium for salt water pools	240.00
---------	---	--------

081083	Magnetic valve for water level regulation 24 VAC 13mm G 1/2" Bürkert	162.00
--------	---	--------

3 CHOOSE YOUR OPTIONS



44121	SPACE 2.0 Pressure Sensor with 1.2m cable (for 2 nd filter if dual filtration system)	250.00
-------	--	--------

90021-D

Check all models
page 32



90033	FlowVis Digital Sensor kit incl Sensor, screws and 8m cable (for second filter if dual filtration system)	450.00
-------	---	--------



90021-D	FlowVis Flow Meter d.63mm (2,4 - 24 m³/h) SPACE ready	250.00
---------	---	--------

90026-D	FlowVis Flow Meter d.75mm (7,0 - 45 m³/h) SPACE ready	250.00
---------	---	--------

90022	FlowVis Flow Meter d.90mm (16 - 54 m³/h) SPACE ready	670.00
-------	--	--------

90023	FlowVis Flow Meter d.110mm (27 - 102 m³/h) SPACE ready	690.00
-------	--	--------

44100	Energy Meter Single-Phase IoT	270.00
-------	-------------------------------	--------

44101	Energy Meter Multi-Phase IoT	340.00
-------	------------------------------	--------

NEW SPACE CONTROL UNITS & EXTENSION MODULE

C/44



44700 44702




44701




Item No.	Description	List price € excl. VAT
44700	SPACE Satellite Data acquisition/Control Unit incl. 2 control relays and 12 inputs, 4 Modbus connections, Air temperature sensor. Integrated Ethernet/Wifi and 4G/GSM Router.	1'990.00
44701	SPACE PRO Data acquisition/Control Unit incl. 17 control relays and 12 inputs, 4 Modbus connections, Air temperature sensor. Integrated Ethernet/Wifi and 4G/GSM Router	2'945.00
44702	SPACE Pilot Extension module for 15 extra control relays. Connects to both SPACE Satellite and SPACE PRO via RJ45 for up to 32 control relays.	1'180.00
Choose your water pressure sensor		
44121	MUST HAVE SPACE 2.0 Pressure Sensor with 1.2m cable (For Acrylic Chamber)	250.00
44109	MUST HAVE SPACE 1.0 Pressure Sensor with 4m cable (For Flow Cell)	270.00

SPACE PROBES AND PROBE HOLDERS

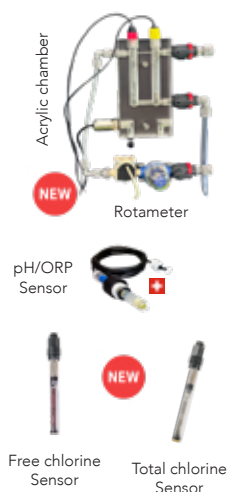

For acrylic chamber

44119	NEW SPACE Acrylic chamber with space to hold 1x pH/ORP probe, 1x SPACE FC Sensor, 2x water pressure sensors, 1x Dryden rotameter.	200.00
44120	NEW Dryden rotameter with flow detector, water temperature and salinity/ conductivity meter with pre-filter.	290.00
44295	SPACE 2.0 pH + ORP Sensor 1.5m cable PLATINUM, PG13,5 thd for fresh water	350.00
44296	SPACE 2.0 pH + ORP Sensor 1.5m cable GOLD, PG13,5 thread for salt water	350.00
44320	SPACE FC Sensor (Free chlorine) kit with plug-in chip (without chamber)	990.00
44303	SPACE 2.0 Prominent FC Sensor with Chamber & installation kit (for CYA)	2'995.00
44302	SPACE Total Chlorine kit incl. Sensor and acrylic Chamber (combine with Free chlorine for combined chlorine measurement)	1'100.00
40150	Pre-filter APIC F20 complete (big version)	157.00

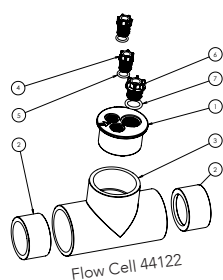

Flow Cell 44122

For Flow Cell

44122	SPACE Flow Cells kit grey incl. 2x Flow Cell caps to hold 1x Water pressure sensor, 1x water temperature sensor (before filter) and 1 pH/ORP Sensor (after filter) with blanking plugs (Needed if SPACE Acrylic chamber is not installed)	55.00
44299	SPACE 1.0 pH + ORP Sensor 4m cable PLATINUM for fresh water (chloriliquid)	350.00
44300	SPACE 1.0 pH + ORP Sensor 4m cable GOLD for salt water pools	350.00
44112	Water Temperature Sensor 4m cable (without holder)	130.00
40052	Flow detector with probe holder, cable 2 x 0,5 mm ² (3m)	120.00

SPACE WATER LEVEL SENSORS



44102

081083

44322

44103

44103	Water Level Sensors for Buffer Tank - overflow pools (4 sensors pack)	240.00
44322	Hydrostatic Pressure Level Meter for Buffer Tank - overflow pools	596.00
44102	Water Level Sensors for Skimmer pools in V4A for liquid chlorine pools	150.00
44102-T	Water Level Sensors for Skimmer pools in Titanium for salt water pools	240.00
081083	Magnetic valve for water level regulation 24 VAC 13mm G ½" Bürkert	162.00

DA-GEN SPACE HYDROLYSERS (COMPATIBLE WITH SPACE SATELLITE AND SPACE PRO)



Item No.	Description	chlorine production		max. pool volume private	List price € excl. VAT
		TDS 1200	TDS 2400		
44400	DA-GEN SPACE 45 incl ModBus	7g	15g	45 m³	1'340.00
44401	DA-GEN SPACE 90 incl ModBus	15g	30g	90 m³	1'650.00
44402	DA-GEN SPACE 150 incl ModBus	25g	50g	150 m³	1'990.00

For DA-GEN SPACE 240 to 750 - See page 12



40208

40208	DA-GEN Sacrifice anode (Maitec) DN50 / d.63mm	190.00
40209	Replacement lid d.63mm + Zinc Anode	82.00
40210	Zinc Anode	44.00



50030 & 50016

SPACE DOSING PUMPS

Item No.	Description	List Price € excl. VAT
50030	Stenner dosing pump Econ VX (0.30 - 2,2 l/h) for pH & ACO	380.00
50016	Stenner Dryden-Floc-pump (3.2 - 240ml) for APF	550.00
40060	Suction lance with level sensor	140.00
90050	Dryden Aqua Safety tub for chemical bottles	99.00



90050



40060



44100

SPACE ENERGY METERS

44100	Energy Meter Single-Phase IoT	270.00
44101	Energy Meter Three-Phase IoT	340.00



BESGO AUTOMATIC VALVES

-	Besgo 5-way automatic backwash valves	Refer to Besgo Price list www.besgo.ch
-	Besgo 3-way valves (suction & rinsing)	Refer to Besgo Price list www.besgo.ch

FLOWVIS FLOWMETERS (FOR DIGITAL FLOW READING)

1. CHOOSE FLOWVIS (More models available page 32 up to d.200mm)

90021-D	New FlowVis Flow Meter d.63mm (2,4 - 24 m³/h) SPACE ready	250.00
90026-D	New FlowVis Flow Meter d.75mm (7,0 - 45 m³/h) SPACE ready	250.00
90022	FlowVis Flow Meter d.90mm (16 - 54 m³/h) SPACE ready	670.00
90023	FlowVis Flow Meter d.110mm (27 - 102 m³/h) SPACE ready	690.00

2. ADD FLOWVIS SENSOR & CABLE (ref 90033)

90033	FlowVis® Digital Sensor with screws and 8m Cable Kit (3 wires)	450.00
-------	--	--------



Choose
FlowVis
Model



Add ref
90033



FlowSonic

FLOWSONIC FLOWMETER (FOR DIGITAL FLOW READING)

90060	Flowmeter FlowSonic kit for SPACE d.63mm (0 - 54 m³/h) incl 5m cable	540.00
-------	--	--------

SPACE

SWIMMING POOL A.I. CLOUD EXPERT


Complete control and monitoring of your pool using A.I

VS PUMPS




Filtration control and optimisation with notifications

BESGO 5 & 3 WAY VALVES

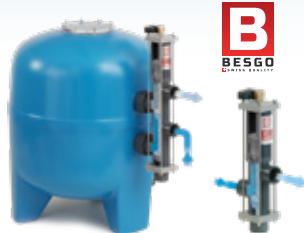

Automatic backwash, automatic rinsing, Dryden's ECO Mode

WATER LEVEL



Smart water level control for skimmer and overflow pools

FLOWVIS



Flowrate control

DAISY and DAISY+



Control and optimisation of water balance and disinfection (liquid chlorine or DA-GEN)




APF® automatic flocculation and ACO® dosing

POOL COVER & OTHER EQUIPMENT



Control of automatic pool covers, management of water attractions, pool lights, heat pumps etc.

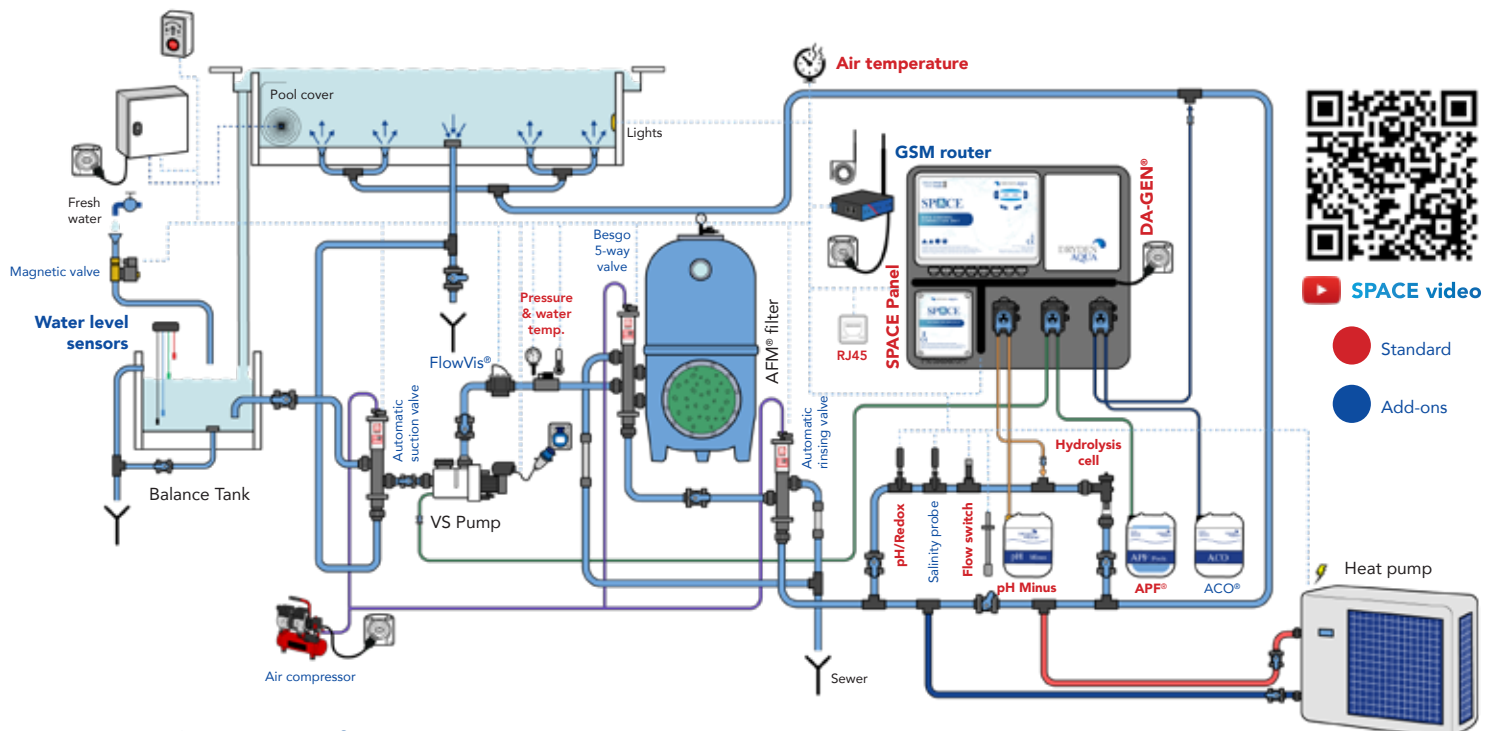

SPACE / DA-GEN® SCHEMATIC DIAGRAM

1 CHOOSE YOUR SPACE PANEL

SPACE Complete DAISY+ (with DA-GEN) for skimmer and overflow pools

C/40



Includes: SPACE Data Control Connection Unit + Extension module (16 outputs + 10 inputs), Quick connect box (for FlowVis, Energymeter), FlowVis 8m cable & digital sensor, **DA-GEN hydrolyser**, flow detector, pH / Redox / pressure / water temp sensors with holders, Air temperature sensor, 1x Dryden Floc pump for APF, 1x Stenner Econ VX for pH Minus, 1x Suction lance with level sensor, pre-assembled on PVC panel. Ethernet/LAN.

Item No.	Description	chlorine production		max. pool volume private	List price € excl. VAT
		TDS 1200	TDS 2400		
44001*	SPACE Complete 45-Rx with APF	7g	15g	45 m³	6'490.00
44002*	SPACE Complete 90-Rx with APF	15g	30g	90 m³	6'795.00
44003*	SPACE Complete 150-Rx with APF	25g	50g	150 m³	7'390.00

SPACE Station DAISY (liquid chlorine) for skimmer and overflow pools

C/40



Includes: SPACE Data Control Connection Unit + Extension module (16 outputs + 10 inputs), Quick connect box (for FlowVis, Energymeter), FlowVis 8m cable & digital sensor, pH / Redox / pressure / water temperature probes with holders, Air temperature sensor, 1x Stenner Econ VX for liquid chlorine, 1x Dryden Floc pump for APF, 1x Stenner Econ VX for pH Minus, 2x Suction lances with level sensor. Pre-assembled on PVC panel. Ethernet/LAN ready.

44004*	SPACE Station Rx with APF Pump	5'370.00
--------	--------------------------------	----------

*** AS LONG AS STOCK LASTS**

2 ADD WATER LEVEL SENSORS ACCORDING TO POOL TYPE (SKIMMER OR OVERFLOW)



44103	Water Level Sensors for Buffer Tank - overflow pools (4 sensors pack)	240.00
44102	Water Level Sensors for Skimmer pools in V4A for liquid chlorine pools	150.00
44102-T	Water Level Sensors for Skimmer pools in Titanium for saltwater pools	240.00
081083	Magnetic valve for water level regulation 24 VAC 13mm G 1/2" Bürkert	162.00

3 CHOOSE YOUR OPTIONS



44104	GSM router, SIM card + Hi-Gain Antenna: Safe Dedicated & Independant connection to local network. Plug & Play: Pre-configured with SIM data card. Must-have option in case RJ45 connection is not possible.	250.00
90021-D	New FlowVis Flow Meter d.63mm (2,4 - 24 m³/h) SPACE ready	250.00
90026-D	New FlowVis Flow Meter d.75mm (7,0 - 45 m³/h) SPACE ready	250.00
44100	Energy Meter Single-Phase IoT	270.00
44101	Energy Meter Multi-Phase IoT	340.00
50030	Stenner dosing pump Econ VX (0.30 - 2,2 l/h) for ACO	380.00
40060	Suction lance with level sensor	140.00
40051	Salinity control kit Hayward with conductivity chip & probe (1/2")	630.00
40149	Probe holder for 1 or 2 options (1/2")	32.00
-	Besgo automatic backwash valves	Refer to Besgo Price list www.besgo.ch
-	Besgo 3-way valves	Refer to Besgo Price list www.besgo.ch

SPACE DATA CONTROL CONNECTION UNIT & EXTENSION MODULE



Item No.	Description	List price € excl. VAT
44200	SPACE Data Control Connection Unit incl. 8 relays, 2 inputs, Quick connect box, FlowVis Digital Sensor with PCB and 8m cable, Air Temperature Sensor, Water Pressure & Temp Sensors, 2 Flow cells caps. Ethernet/LAN ready.	2'490.00
44200-WDF	SPACE Data Control Connection Unit. Same as 44200, without digital flow control (WDF)	1'890.00
44201	SPACE Extension Module for 8 extra outputs + 8 inputs.	470.00


SPACE EQUIPMENT

SPACE GSM Router



44104	GSM router, SIM card + Hi-Gain Antenna: Safe Dedicated & Independant connection to local network. Plug & Play: Pre-configured with SIM data card. Must-have option in case RJ45 connection is not possible.	250.00
-------	---	--------

SPACE Smart Sensors



44300	SPACE 1.0 pH + ORP Sensor 4m cable GOLD for salt water pools	350.00
44299	SPACE 1.0 pH + ORP Sensor 4m cable PLATINUM for fresh water (chloriliquid)	350.00
44301	SPACE 1.0 Prominent FC Sensor with Chamber and installation kit (for CYA) with Modbus plug (compatible ModBus hub)	2'995.00

SPACE Water Level Sensors



44103	Water Level Sensors for Buffer Tank - overflow pools (4 sensors pack)	240.00
44102	Water Level Sensors for Skimmer pools in V4A for liquid chlorine pools	150.00
44102-T	Water Level Sensors for Skimmer pools in Titanium for salt water pools	240.00
081083	Magnetic valve for water level regulation 24 VAC 13mm G 1/2" Bürkert	162.00

DA-GEN SPACE Hydrolyser



Item No.	Description	chlorine production		max. pool volume	List price € excl. VAT
		TDS 1200	TDS 2400	private	
44400	DA-GEN SPACE 45 incl ModBus	7g	15g	45 m³	1'340.00
44401	DA-GEN SPACE 90 incl ModBus	15g	30g	90 m³	1'650.00
44402	DA-GEN SPACE 150 incl ModBus	25g	50g	150 m³	1'990.00

For DA-GEN SPACE 240 to 750 - See page 12

40051	Salinity control kit Hayward with conductivity chip & probe (1/2")	640.00
40052	Flow detector with probe holder, cable 2 x 0,5 mm² (3m)	120.00
40208	DA-GEN Sacrifice anode DN50 / d.63mm	190.00
40209	Replacement lid d.63mm + Zinc Anode	82.00
40210	Zinc Anode	44.00

Dosing pumps

50030	Stenner dosing pump Econ VX (0.30 - 2,2 l/h) for pH & ACO	380.00
50016	Dryden-Floc pump (3.2 - 240ml) for APF	550.00
40060	Suction lance with level sensor	140.00
90050	Dryden Aqua Safety tub for chemical bottles	99.00

Energy Meters

Item No.	Description	List price € excl. VAT
44100	Energy Meter Single-Phase IoT	270.00
44101	Energy Meter Three-Phase IoT	340.00

BESGO Automatic Valves

Item No.	Description	List price € excl. VAT
-	Besgo 5-way automatic backwash valves	Refer to Besgo Price list www.besgo.ch
-	Besgo 3-way valves (suction & rinsing)	Refer to Besgo Price list www.besgo.ch

Digital Flow for SPACE ref 44200

90021-D	New FlowVis Flow Meter d.63mm (2,4 - 24 m³/h) SPACE ready	250.00
90026-D	New FlowVis Flow Meter d.75mm (7,0 - 45 m³/h) SPACE ready	250.00
90022	FlowVis Flow Meter d.90mm (16 - 54 m³/h) SPACE ready	670.00
90023	FlowVis Flow Meter d.110mm (27 - 102 m³/h) SPACE ready	690.00

Digital Flow for SPACE ref 44200-WDF

With FlowVis

44106	FlowVis Digital Flow kit complete (PCB, Digital sensor, screws and 8m cable) => Includes ref 44116 (PCB) + ref 90033 (Digital sensor, screws, 8m cable)	600.00
90021-D	New FlowVis Flow Meter d.63mm (2,4 - 24 m³/h) SPACE ready	250.00
90026-D	New FlowVis Flow Meter d.75mm (7,0 - 45 m³/h) SPACE ready	250.00
90022	FlowVis Flow Meter d.90mm (16 - 54 m³/h) SPACE ready	670.00
90023	FlowVis Flow Meter d.110mm (27 - 102 m³/h) SPACE ready	690.00

With FlowSonic

90060	Flowmeter FlowSonic for SPACE d.63mm (0 - 54 m³/h) incl 5m cable	540.00
44116	PCB Digital Flow (compatible with Flowsonic and FlowVis Flowmeters)	150.00
44117	24VAC Power Supply for SPACE - FlowSonic connection	30.00




Maintenance & Consumables


Item No.	Description	List price € excl. VAT
44200-15	Pack of 10 pH+ORP Sensor Cleaning Tools	70.00
44200-16	pH+ORP Sensor Wetting Bottle	3.00

SPACE Parts

44200-1	Faceplate SPACE DCCU - DIAG 1: 2,3	370.00
44200-2	PCB Power Supply Kit PCB103 (including fuses) EU - DIAG 1: 7	499.00
44200-4	Replacement PCB Micro Kit SPACE - DIAG 1: 10	415.00
44200-5	PCB Connection Kit SE Data - DIAG 1: 8	230.00
44109	SPACE 1.0 Pressure Sensor 4m cable (adapted to Flow Cell ref 44122)	270.00
44112	Water Temperature Sensor 4m cable (without holder)	130.00
44113	Air Temperature Sensor, cable 4.5m	58.00
44105	Flow Cell Cap Kit SPACE, grey - DIAG 2: 1, 2, 4, 5, 6, 7	30.00
44105-1	Blanking Plugs Kit for Flow Cell - DIAG 2: 4, 5, 6, 7	9.00
44300-1	pH+ORP Sensor Housing Kit	11.00
44300-2	Fastening Kit for pH+ORP Sensor	8.00
44200-7	RJ45 Cable 1m for DCCU Black	5.30
44200-19	Switch DCCU - DIAG 1: 4	16.00
44108	SPACE Modbus Cable Kit (Cable Modbus + Cable FL1)	90.00
44108-1	Cable Modbus QuickConnect - DA-GEN	65.00
44108-2	Cable - DA-GEN Backup FL1	25.00
44201-1	PCB Extension Module (XM8)	200.00
44201-2	Cable Extension Module (XM8)	22.00
44200-9	Modbus Hub	115.00
44200-10	Modbus Plug 6 Pins	9.50

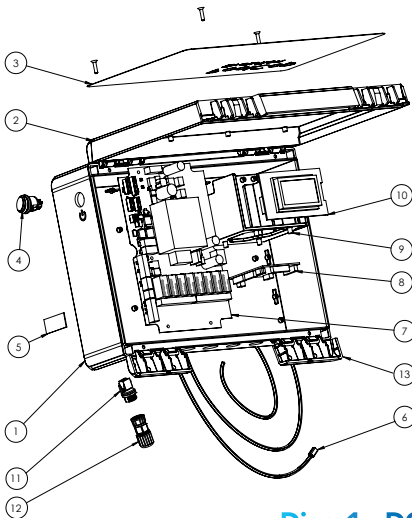

Diag 1 - DCCU

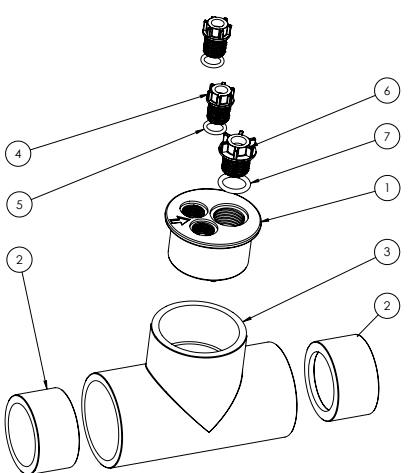

Diag 2 - Flow Cell



SPACE EVOLUTION - ONLY WITH AUTOMATIC 6 WAY VALVE

Item No.	Description	List price € excl. VAT
44500	SPACE Evolution 1,5" (max 16 m³/h) with Water Pressure & Temp Sensors	2'550.00
44501	SPACE Evolution 2.0" (max 30 m³/h) with Water Pressure & Temp Sensors	2'750.00

SPACE Evolution pH/ORP Sensors and Digital Flow kit

44502	SPACE Evolution pH/ORP GOLD Sensor kit (For salt water pools)	310.00
44297	SPACE Evolution pH/ORP PLATINUM Sensor kit (small pool volume, liquid chlorine)	310.00
44106	FlowVis Digital Flow kit complete (Digital sensor, PCB, screws and 8m cable)	600.00

Filter Connection Kits for SPACE Evolution 1,5" (d50mm)

44600	Filter Connection Kit Hayward 1.5"	130.00
44601	Filter Connection Kit Pentair 1.5"	250.00
44602	Filter Connection Kit Calplas 1.5"	30.00
44603	Filter Connection Kit Astral, Espa, MMC, Certikin 1.5"	110.00
44604	Filter Connection Kit Behncke 1.5"	30.00

Filter Connection Kits for SPACE Evolution 2.0" (d63mm)

44605	Filter Connection Kit Hayward 2.0"	230.00
44606	Filter Connection Kit Pentair 2.0"	260.00
44607	Filter Connection Kit Calplas 2.0"	85.00
44608	Filter Connection Kit Astral, Espa, MMC, Certikin 2.0"	150.00
44609	Filter Connection Kit Behncke 2.0"	85.00

SPACE GSM Router

44104	GSM router, SIM card + Hi-Gain Antenna: Safe Dedicated & Independent connection to local network. Plug & Play: Pre-configured with SIM data card. Must-have option in case RJ45 connection is not possible.	250.00
-------	---	--------



44104

FlowVis®

FLOWMETER



„Know the flow - Know the speed!“

FlowVis - Your swimming pool's speedometer

H₂Flow - FlowVis Flow Meter

C/90

The Flow Meter FlowVis® from H₂Flow can be installed in every direction. DN 40 and 50 has included a NRV (not return valve). The average accuracy is 98%. The product is NSF 50 certified and a product of high quality. Scale in m³/h. Made in the USA.



90028-C



90030



90033



44116

= 44106

Item No.	Description			List price € excl. VAT
90020	FlowVis® Flow Meter with NRV*	d50 mm	2,4 - 21 m³/h	230.00
90021	FlowVis® Flow Meter with NRV*	d63 mm	2,4 - 24 m³/h	230.00
90021-D	FlowVis® Flow Meter	d63 mm	2,4 - 24 m³/h	250.00
90026	FlowVis® Flow Meter*	d75 mm (to glue outside)	7,0 - 45 m³/h	230.00
90026-D	FlowVis® Flow Meter	d75 mm (to glue outside)	7,0 - 45 m³/h	250.00
90022	FlowVis® Flow Meter	d90 mm	16 - 54 m³/h	670.00
90023	FlowVis® Flow Meter	d110 mm	27 - 102 m³/h	690.00
90027	FlowVis® Flow Meter	d160 mm	68 - 227 m³/h	790.00
90028	FlowVis® Flow Meter	d200 mm	113 - 420 m³/h	930.00
90027-C	FlowVis® with clamps	d160 mm	68 - 227 m³/h	940.00
90028-C	FlowVis® with clamps	d200 mm	113 - 420 m³/h	990.00
90030	FlowVis® Digital Display for all installations: Digital Display in casing			900.00
44106	FlowVis Digital Flow kit complete (PCB, Digital sensor, screws and 8m cable) => Includes ref 44116 (PCB) + ref 90033 (Digital sensor, screws, 8m cable)			600.00
44116	PCB Digital Flow for SPACE 2025 (compatible with Flowsonic and FlowVis Flowmeters)			150.00
90033	FlowVis® Digital Sensor with screws and 8m Cable Kit (3 wires)			450.00
90035	FlowVis Digital extension cable 10m including 1 electrical box (3 wires)			150.00
90035-O	FlowVis® Display extension cable 8m (with 2 plugs)			255.00
90036	FlowVis® Digital Relay Interface Kit			140.00
90032	FlowVis® Flapper Indicator with magnet for d50mm - d63mm (retrofit)			40.00
90043	FlowVis® Flapper Indicator with magnet for d75-HF (retrofit)			40.00
90044	FlowVis Digital Signal Converter (for connection to BMS)			260.00

NEW

Item No.	Description	List price € excl. VAT
90024	FlowVis Service Kit d50mm/d63mm/d75mm (new gasket, springs, flap)	90.00
90024-75HF	FlowVis Service Kit d75mm HF (new gasket, springs, flap)	90.00
90041	FlowVis d50 Lid w/ scale label. Excludes service kit parts	98.00
90042	FlowVis d63/75 Lid w/ scale label. Excludes service kit parts	98.00
90039	FV-M-d 90 Lid assembly (incl. flapper)	490.00
90040	FV-M-d 110 Lid assembly (incl. flapper)	490.00
90037	FV-M-d 160 Lid assembly (incl. flapper)	490.00
90038	FV-M-d 200 Lid assembly (incl. flapper)	490.00

* items sold in the following packing units: 27 pcs. per box

items marked in blue already come equipped with magnets for digital upgrade

SPECK X



The new FlowSonic from Speck enables highly accurate and lossless measurements, utilizing cutting-edge **ultrasound technology**. This innovative approach ensures precise flow rate monitoring, allowing you to adjust your pump and other equipment accordingly. The device has a measurement range of 0 to 54 m³/h.

Installation is simple with a 63 mm PVC hard pipe socket connection. The FlowSonic is also suitable for use in saltwater pools, with a tolerance of up to 3% salinity.

Note: FlowSonic does not have an integrated power supply and requires connection to a pool control system capable of receiving analog signals (4 - 20 mA).

Speck Germany - FlowSonic Flowmeter

C/90



90060

- High-precision flow meter with ultrasound technology
- Compatible with pool control systems receiving analog signals (4 - 20 mA)
- Proven Speck quality, made in Germany
- Operational up to a water temperature of 45°C




90061

Item No.	Description			List price € excl. VAT
90060	Flowmeter FlowSonic (For SPACE) incl 5m cable	d63 mm	0 - 54 m³/h	540.00
90061	Flowmeter FlowSonic+ (with Digital Display)	d63 mm	0 - 54 m³/h	650.00

i OPERATIONAL DATA FLOWVIS

Max working pressure	3.5 Bar
Min/Max operating ambient temp	0°C / 60°C
Periodic calibration	Not required




Download the FlowVis® brochure for exact pressure drops and dimensions of each model

► The best solution to remove organics & organo-chloramines in indoor pools

Advanox™ stands for “Advanced Oxidation” and is a state-of-the-art water treatment system designed to **remove organic materials from the water** by oxidations through reactions with hydroxyl radicals ($\cdot\text{OH}$).

Hydroxyl radicals are one of the most powerful oxidants, do not form any harmful by-products and are able to oxidise the most difficult compounds including cosmetics, pharmaceuticals and toxins for **the highest water quality**.

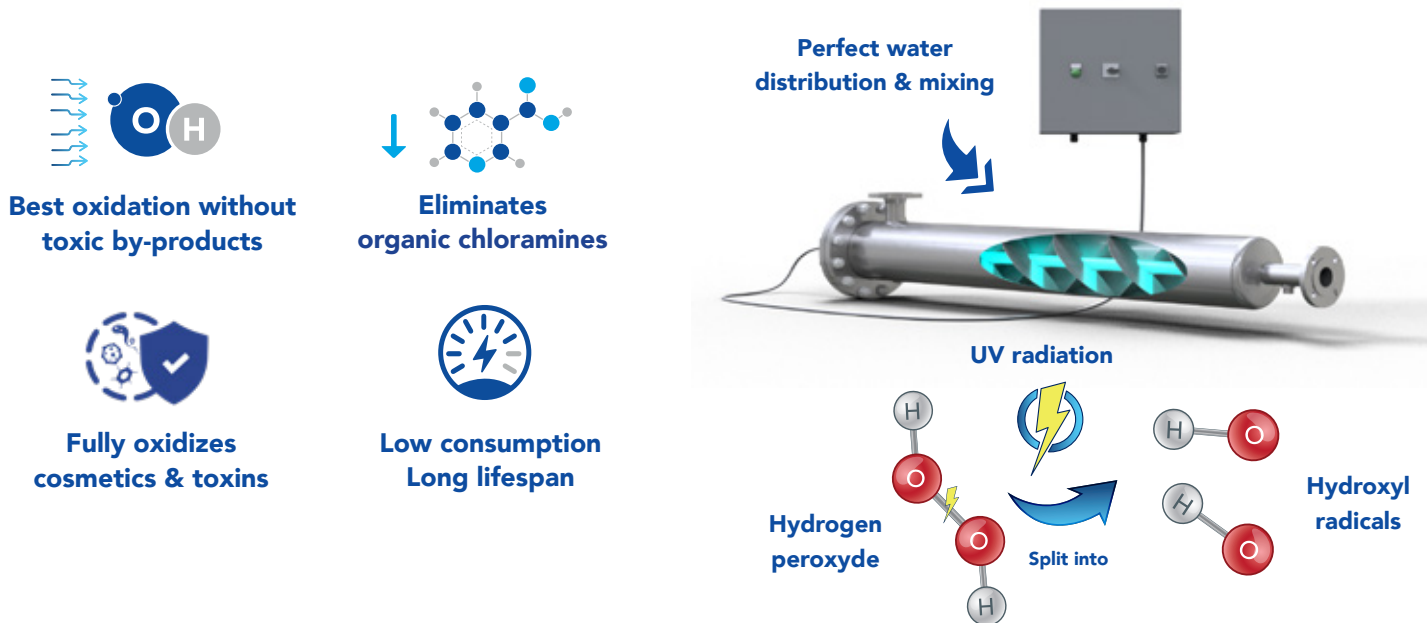

► Always in combination with DAISY®

DAISY® was designed to eliminate inorganic chloramines including harmful trichloramines (NCl_3) and to reduce the formation of THMs in all swimming pools. When DAISY® is used in combination with Advanox™, the lowest combined chlorine concentration < 0.2 ppm and the lowest THMs levels are achieved! Unlike medium pressure UV systems, Advanox™ does not produce THMs, does not consume chlorine in the process and offers much lower maintenance costs. **DAISY® + Advanox™ : The best and most sustainable solution to remove combined chlorine in all indoor pools!**



Product description	AOP-80	AOP-150	AOP-250	AOP-500
Pool Size (m ³)	<80m ³	<150m ³	<250m ³	<500m ³
Capacity in m ³ /h	1.1	2.5	4	8
Power consumption in W	140	380	660	660
Effective UV-C in W	40	110	200	200
Installation	vertical or horizontal	Horizontal		
Number of lamps	1	1	1	1
Reactor diameter in mm	150	90	130	200

Item No	Description	List Price € excl VAT
ADVANOX: ADVANCED OXIDATION FOR POOLS		
92080	AOP 80 incl. 1 extra lamp and TSS for <80m ³ pools - Flange DN40	6'260.00
92100	AOP 150 incl. 1 extra lamp and TSS, for <150m ³ pools - Flange DN50	8'710.00
92250	AOP 250 incl. 1 extra lamp and TSS, for <250m ³ pools - Flange DN50	12'090.00
92500	AOP 500 incl. extra lamp and TSS, for <500m ³ pools - Flange DN50	13'535.00
Spare parts		
92002	Replacement lamp Advanox 80, UN-C lamp - 120W LL, 12'000h lifetime	670.00
92000	Replacement lamp Advanox 150 UN-C lamp - 350W LL, 12'000h lifetime	720.00
92001	Replacement lamp Advanox 250 & 500, UN-C lamp - 600W LL, 12'000h lifetime	940.00
92054	Quartz sleeve Advanox AOP 80	380.00
92052	Quartz sleeve Advanox AOP 150 - 250 - 500	435.00
92053	TSS - Temperature sensor safety	255.00
Equipment		
50016	Dryden Floc-pump 3.2 - 240 ml/h for H ₂ O ₂ dosing	550.00
92050	Flowmeter Advanox M355: d40mm 250 - 2500l/h for AOP-80 and AOP-150	286.00
92051	Flowmeter Advanox M355: d50mm 1000- 10'000l/h for AOP-250 and AOP-500	426.00



50016


92050
& 92051

Advanox™ represents a much more effective & healthier solution than UV Medium pressure systems. It is also a perfect alternative to ozone with much lower CAPEX and OPEX! Scan for more information.




DAISY / DAISY+ SKIDS WITH SPACE

SWIMMING POOL AL. CLOUD EXPERT

ADAPTED TO SKIMMER & OVERFLOW POOLS



Production time: 4 weeks
Price of systems excluding AFM®
Price ex Works Büsserach, Switzerland

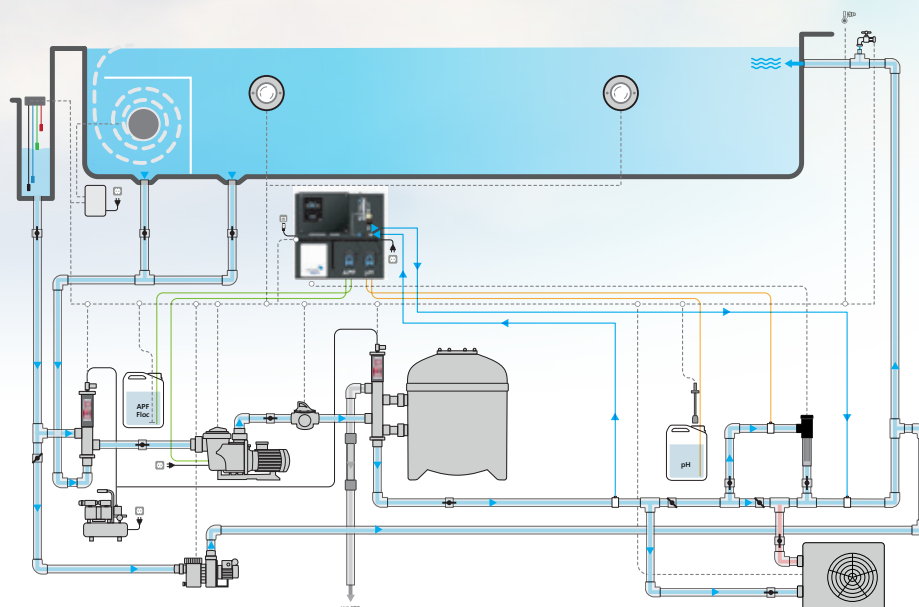

DAISY®/DAISY+ skids with SPACE! Complete skid mounted filtration systems

1 CHOOSE YOUR SKID



DA-GEN SPACE
45-90-150



Rotameter

Item No	Description	List Price € excl VAT
DAISY+ WITH SPACE & DA-GEN FOR SKIMMER & OVERFLOW POOLS		
044060	Calplas Filter AFM-640 mm , Speck Badu Delta ECO VS 1.10 kW 230 V, Besgo valves DN50/d63 & Air compressor, FlowVis + digital sensor, SPACE PRO Control Unit (17 outputs, 12 inputs), 4 Modbus connections, DA-GEN SPACE 45 hydrolyser , SPACE Acrylic chamber incl. 1x GOLD pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, Air temperature sensor, Dryden-Floc pump for APF, 1x Stenner Econ VX for pH Minus, 1x Suction lance with level sensor. Integrated Ethernet/Wifi and 4G/GSM Router. Dimensions: 1500 x 780 x 1800 mm (l * w * h)	22'520.00
044061	Calplas Filter AFM-720 mm , Speck Badu Delta ECO VS 1.10 kW 230 V, Besgo valves DN50/d63 & Air compressor, FlowVis + digital sensor, SPACE PRO Control Unit (17 outputs, 12 inputs), 4 Modbus connections, DA-GEN SPACE 90 hydrolyser , SPACE Acrylic chamber incl. 1x GOLD pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, Air temperature sensor, Dryden-Floc pump for APF, 1x Stenner Econ VX for pH Minus, 1x Suction lance with level sensor. Integrated Ethernet/Wifi and 4G/GSM Router. Dimensions: 1500 x 780 x 1800 mm (l * w * h)	23'590.00
044062	Calplas Filter AFM-960 mm , Speck Badu EcoFlex VS 2.20 kW 230 V, Besgo valves DN65/d75, & Air compressor, FlowVis + digital sensor, SPACE PRO Control Unit (17 outputs, 12 inputs), 4 Modbus connections, DA-GEN SPACE 150 hydrolyser , SPACE Acrylic chamber incl. 1x GOLD pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, Air temperature sensor, Dryden-Floc pump for APF, 1x Stenner Econ VX for pH Minus, 1x Suction lance with level sensor. Integrated Ethernet/Wifi and 4G/GSM Router. Dimensions: 1850 x 1120 x 1800 mm (l * w * h)	29'750.00



Liquid chlorine



Digital flow control always included

Item No	Description	List Price € excl VAT
---------	-------------	--------------------------

DAISY WITH SPACE FOR SKIMMER & OVERFLOW POOLS (LIQUID CHLORINE VERSION)

044063	Calplas Filter AFM-640 mm , Speck Badu Delta ECO VS 1.10 kW 230 V, Besgo valves DN50/d63 & Air compressor, FlowVis + digital sensor, SPACE PRO Control Unit (17 outputs, 12 inputs) , 4 Modbus connections, 1x FlowVis Digital Flow kit, SPACE Acrylic Cell incl. 1x Platinum pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, Air temperature sensor, 1x Dryden-Floc pump for APF , 1x Stenner Econ VX for pH Minus, 1x Stenner Econ VX for liquid chlorine , 2x Suction lances with level sensor. Integrated Ethernet/ Wifi and 4G/GSM Router. Dimensions: 1500 x 780 x 1800 mm (l * w * h)	20'990.00
044064	Calplas Filter AFM-720 mm , Speck Badu Delta ECO VS 1.10 kW 230 V, Besgo valves DN50/d63 & Air compressor, FlowVis + digital sensor, SPACE PRO Control Unit (17 outputs, 12 inputs) , 4 Modbus connections, 1x FlowVis Digital Flow kit, SPACE Acrylic Cell incl. 1x Platinum pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, Air temperature sensor, 1x Dryden-Floc pump for APF , 1x Stenner Econ VX for pH Minus, 1x Stenner Econ VX for liquid chlorine , 2x Suction lances with level sensor. Integrated Ethernet/ Wifi and 4G/GSM Router. Dimensions: 1500 x 780 x 1800 mm (l * w * h)	21'390.00
044065	Calplas Filter AFM-960 mm , Speck Badu EcoFlex VS 2.20 kW 230 V, Besgo valves DN65/d75 & Air compressor, FlowVis + digital sensor, SPACE PRO Control Unit (17 outputs, 12 inputs) , 4 Modbus connections, 1x FlowVis Digital Flow kit, SPACE Acrylic Cell incl. 1x Platinum pH/ORP sensor, 1x water pressure sensor and 1x rotameter for flow detection, salinity and water temperature measurement, Air temperature sensor, 1x Dryden-Floc pump for APF , 1x Stenner Econ VX for pH Minus, 1x Stenner Econ VX for liquid chlorine , 2x Suction lances with level sensor. Integrated Ethernet/ Wifi and 4G/GSM Router. Dimensions: 1850 x 1120 x 1800 mm (l * w * h)	26'990.00

2 ADD YOUR WATER LEVEL SENSORS ACCORDING TO POOL TYPE



44103	Water Level Sensors for Buffer Tank - overflow pools (4 sensors pack)	240.00
44322	Hydrostatic Pressure Level Meter for Buffer Tank - overflow pools	596.00
44102	Water Level Sensors for Skimmer pools in V4A for liquid chlorine pools	150.00
44102-T	Water Level Sensors for Skimmer pools in Titanium for salt water pools	240.00
081083	Magnetic valve for water level regulation 24 VAC 13mm G ½" Bürkert	162.00

3 CHOOSE YOUR OPTIONS



44320	SPACE Free Chlorine Option (C) includes FC sensor with plug-in PCB without chamber. The sensor is placed in the acrylic chamber of the panel.	990.00
44302	SPACE Total Chlorine Option (D) includes TC Sensor and a separate acrylic Chamber. Combine with Free chlorine Option for combined chlorine measurement.	1'100.00



44100

44100	Energy Meter Single-Phase IoT	270.00
44101	Energy Meter Multi-Phase IoT	340.00



DOWNLOADS

Validity of prices:

Because of the very expansive politics of the European Central Bank ECB and the politics of the EU we see a high chance to get a very high inflation in 2026. Therefore our prices are valid until the end of the year unless we reach an inflation rate of > 10%. In that case we will increase our prices accordingly. **We will give you 10 – 30 days of notice time.**